



DESCRIPTION

General

Bolt-on components provide static and in-motion weighing for conventional conveyor sections. Gain added functionality from the same physical footprint and save steps to increase productivity.

Weigh Legs can be installed on new systems or retrofitted to existing conveyors. Weigh Legs consists of modular components for custom system design.

Design

Weigh Leg Frame – The Weigh Leg frame is an integrated assembly, incorporating two supporting legs, two Weigh Bars®, junction box and cabling. Available in mild steel or stainless steel.

Installation – Bolt-on Weigh Leg frames replace existing conveyor legs. Junction boxes include pre-wired input and output cables for fast setup. Typically, two frames are required per conveyor. For static applications that require the use of two conveyor sections to create a longer weighing platform, a third frame is installed where the sections are joined together.

Options

Conveyor Sections – Avery Weigh-Tronix carries static conveyor sections and in-motion conveyor sections to build a complete conveyor system.

Indicators – Avery Weigh-Tronix offers weight indicators matched to the operational requirements of different conveyor systems. Choose from any of the Z Series Indicators to provide options ranging from in-motion weighing to PLC or PC interfaces.

Photo Eye Kit – Required for in-motion conveyors. Beam-breaking technology with one-shot logic module provides reliable detection of in-motion packages or materials.

Weigh Legs Frame

Capacities – 250 lb, 500 lb and 1,000 lb. per Weigh Leg frame.

Total scale capacity is double the individual frame rating.


When selecting a capacity, the weight of the conveyor section must be factored in.

Physical Dimensions –

Widths – 24", 28", 30", 34", 36", 40" and 42"

Adjustable leg height – 23-5/8" to 35-5/8"

Finish – Heat-fused powder paint provides a high level of corrosion protection.

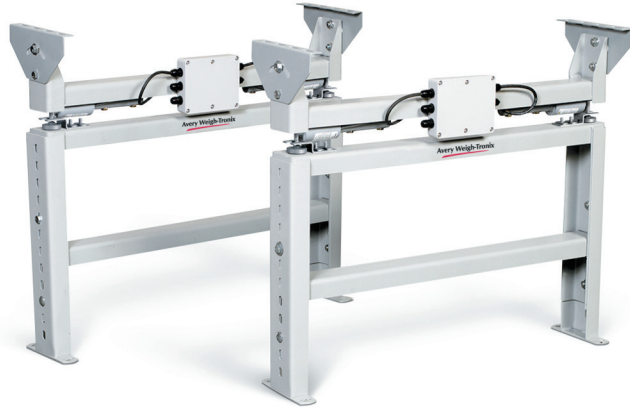

Weigh Legs frame

Static Conveyor Sections

Sizes – 24", 28", 30", 34", 36", 40" and 42" widths; 5' or 10' lengths

Rollers – Placed on 3" centers for even load support and "set high" for unobstructed conveyance. 1.9" diameter, 16 ga. mild steel.

Load Rating –

5' length – up to 600 lbs per foot,

10' length – up to 135 lbs per foot

Weighing Accuracy – 0.1% for static conveyors (applied load)

In-Motion Conveyor Sections

Sizes – Available in 24" and 30" belt widths; 6' and 11' lengths

Speeds – Range of fixed speeds from 65 to 130 FPM. Variable speed tops also available with speeds up to 220 FPM.

Load Rating – Up to 75 lbs per foot, 200 lb maximum in-motion weighing capacity.

Motor – For 65 FPM – 1/2 HP, 230/460 VAC, 3 PH, 60 Hz

Construction – Nitrile impregnated belt with one side brushed, formed 12 ga. steel slider bed, 4" depth, powder painted finish.

Weighing Accuracy – In-motion accuracy is dependent upon conveyor speed, package spacing, etc. Consult factory.



Weigh Legs with in-motion conveyor section

Weigh Bar® is a registered trademark of Avery Weigh-Tronix, LLC.

Avery Weigh-Tronix

www.averyweigh-tronix.com

Avery Weigh-Tronix is an ITW company



Avery Weigh-Tronix is a trademark of the Illinois Tool Works group of companies whose ultimate parent company is Illinois Tool Works Inc ("Illinois Tool Works"). Copyright © 2022 Illinois Tool Works. All rights reserved. This publication is issued to provide outline information only and may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print, however Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.

WLlegs_spec_09793-0010indd
V2 09793-0010